



TUSKO[®]

TK130

国四液压挖掘机 HYDRAULIC EXCAVATOR

工作质量
Quality of work
14000kg

铲斗容量
Bucket capacity
0.66m³

额定功率
Rated power
96kW/2200rpm



Shandong Tusko Industrial Technology Co., Ltd.
Add: No. 66 Binhe east road, Economic Development
Zone, Linyi city, Shandong, China



Web: www.tusko.com.cn
Email: sales@tusko.com.cn
Mob: +86-17568072206



* 本图册所列参数及图形照片, 仅供参考, 因产品不断改进参数会有所变动, 恕不通知, 请以实物为准。
* DUE TO OUR POLICY OF CONTINUOUS PRODUCT IMPROVEMENTS, ALL DESIGNS AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


工作范围 Working Ranges mm

a	最大挖掘高度 Max. digging height	8579
b	最大卸载高度 Max. dumping height	6188
c	最大挖掘深度 Max. digging depth	5456
e	最大垂直挖掘深度 Max. digging depth	4888
f	最大挖掘半径 Max. digging reach on ground	8283
g	最小回转半径 Min. swing radius	2501

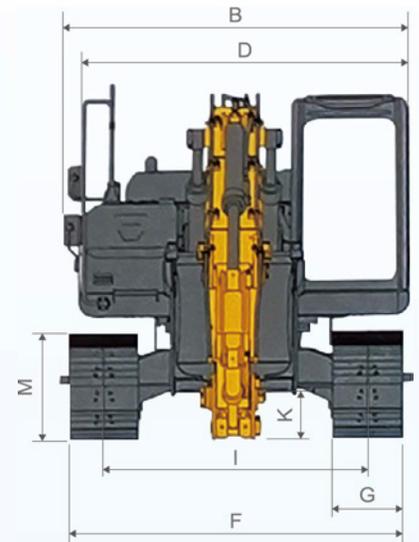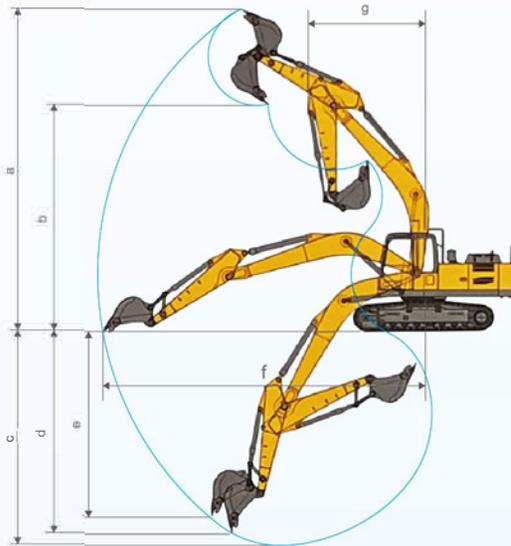

外形尺寸 Dimensions mm

A	总长 Overall length	7700
B	总宽 Overall width	2550
C	总高 Overall height	2918
D	转台宽度 Overall width of upperstructure	2490
E	履带长度 Track length	3664
F	底盘宽度 Chassis width	2490
G	履带宽度 Track shoe width	500
H	履带轴距 Track length on ground	2390
I	轨距 Track gauge	1990
J	配重离地间隙 Counterweight clearance	911.5
K	最小离地间隙 Min. ground clearance	425.5
L	尾部最小回转半径 Min. tail swing radius	2255
M	履带高度 Track height	950

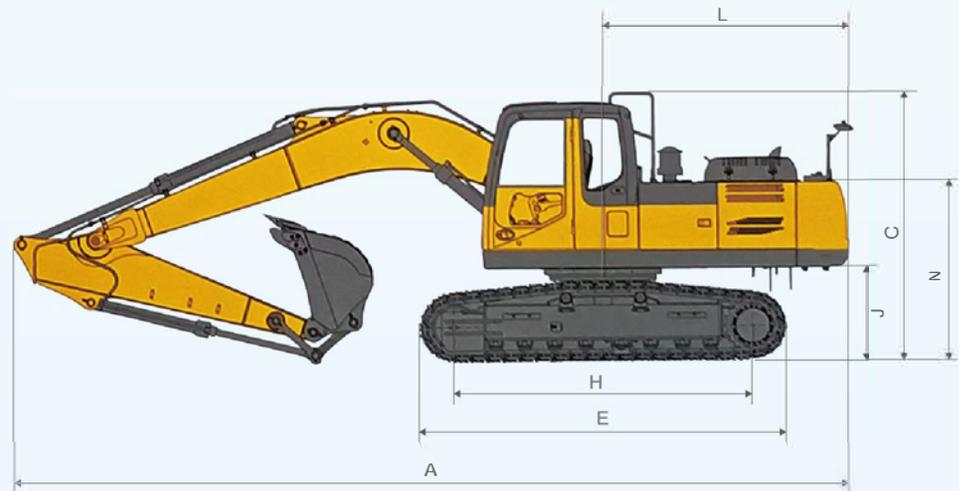

整机参数 Key Spec

产品型号 Product model		TZ130
操作重量 Operating weight	kg	14000
铲斗容量 Bucket capacity	m ³	0.66
发动机 Motor		
发动机型号 Motor model	/	F4.5
直喷 Direct injection	/	✓
4冲程 4-stroke	/	✓
水冷 Water cooled	/	✓
缸数 No. of cylinders	/	4
发动机额定功率 Rated power	kW/rpm	96/2200
排量 Displacement	L	4.5
油类容量 Oil Capacity		
燃油箱容积 Fuel tank	L	270
液压油箱容积 Hydraulic tank	L	190
发动机机油容量 Engine oil	L	18
液压系统 Hydraulic System		
主泵额定流量 Rated flow of main pump	L/min	2x118

主安全阀压力 Pressure-main valve	MPa	34.3
行走系统压力 Pressure-travel system	MPa	34.3
回转系统压力 Pressure-swingsystem	MPa	27
先导系统压力 Pressure-pilot system	MPa	3.9

主要性能 Main Performance		
行走速度 (高/低) Travel speed (high/low)	km/h	5.5/3.5
回转速度 Swing speed	r/min	12.2
爬坡能力 Gradeability	•	35
接地比压 Ground pressure	kPa	41.2
铲斗挖掘力 Bucket digging force	kN	102.8
斗杆挖掘力 Arm digging force	kN	65
最大牵引力 Max. traction force	kN	120.75

标配 Standard		
动臂长度 Boom length	mm	4600
斗杆长度 Arm length	mm	2900
铲斗容量 Bucket capacity	m ³	0.66