

TUSKO[®]

TK1350

国四液压挖掘机

HYDRAULIC EXCAVATOR

工作质量

Quality of work

130000kg

铲斗斗容

Bucket capacity

8.0~10m³

额定功率

Rated power

567kW/1800rpm



Shandong Tusko Industrial Technology Co., Ltd.
Add: No. 66 Binhe east road, Economic Development
Zone, Linyi city, Shandong, China

售后服务热线(Service): 4008-0539-07
Web: www.tusko.com.cn
Email: Sales@tusko.com.cn
Mob: +86-17568072206




工作范围 Working Ranges mm

a	最大挖掘高度 Max. digging height	12601
b	最大卸载高度 Max. dumping height	8049
c	最大挖掘深度 Max. digging depth	7983
e	最大垂直挖掘深度 Max. digging depth	5047
f	最大挖掘半径 Max. digging reach on ground	13862
g	最小回转半径 Min. swing radius	6551

外形尺寸 Dimensions mm

A	总长 Overall length	14804
B	总宽 Overall width	5582
C	总高 Overall height	4317
D	转台宽度 Overall width of upperstructure	3500
E	履带长度 Track length	6551
F	底盘宽度 Chassis width	4952
G	履带宽度 Track shoe width	700
H	履带轴距 Track length on ground	5200
I	轨距 Track gauge	3900
J	配重离地间隙 Counterweight clearance	1899
K	最小离地间隙 Min. ground clearance	1127
L	尾部最小回转半径 Min. tail swing radius	4945
M	履带高度 Track height	1723

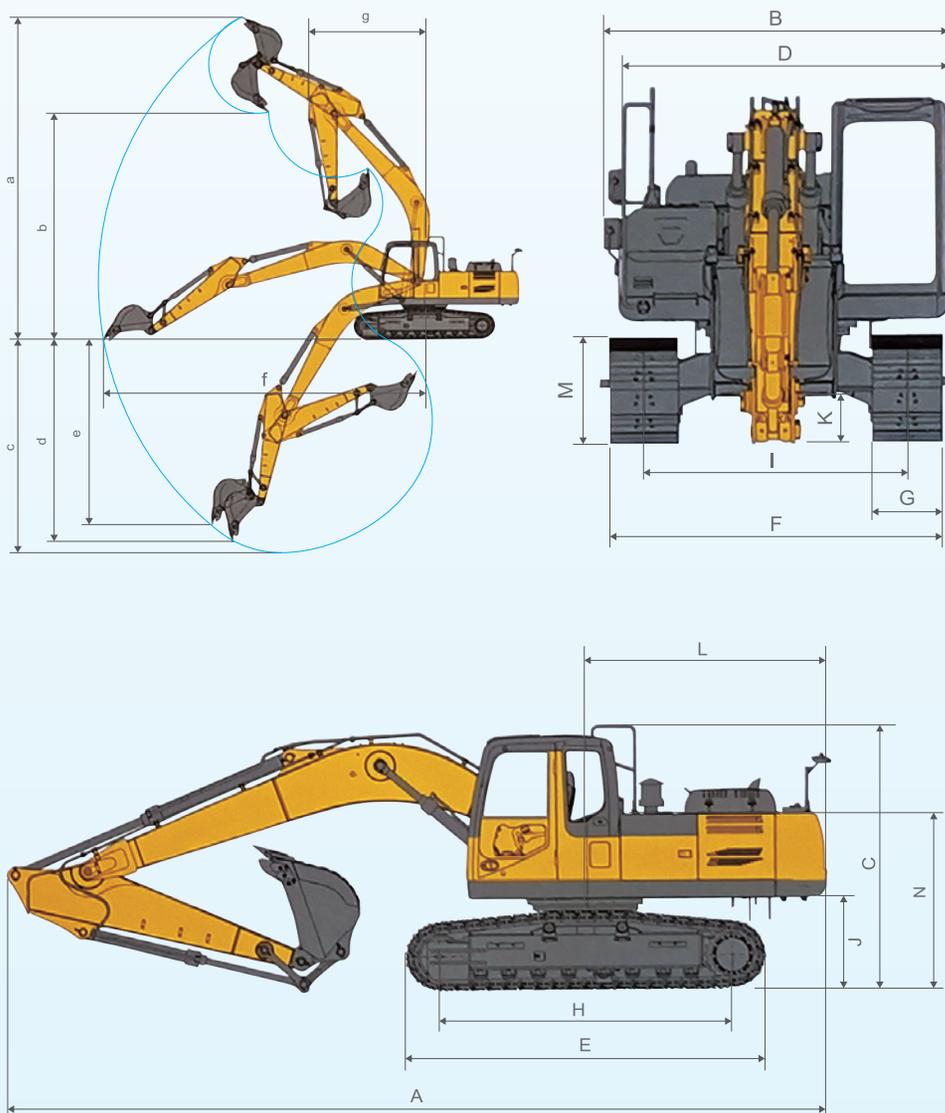

整机参数 Key Spec

产品型号 Product model	TZ1350	
操作重量 Operating weight	kg	130000
铲斗容量 Bucket capacity	m ³	8.0~10
发动机 Engine		
发动机型号 Engine model	/	QSK23
直喷 Direct injection	/	✓
4冲程 4-stroke	/	✓
水冷 Water cooled	/	✓
缸数 No. of cylinders	/	6
发动机额定功率 Rated power	kW/rpm	567/1800
排量 Displacement	L	23.14
油类容量 Oil Capacity		
燃油箱容积 Fuel tank	L	1600
液压油箱容积 Hydraulic tank	L	1390
发动机机油容量 Engine oil	L	70
液压系统 Hydraulic System		
主泵额定流量 Rated flow of main pump	L/min	1820

主安全阀压力 Pressure-main valve	MPa	34.3
行走系统压力 Pressure-travel system	MPa	34.3
回转系统压力 Pressure-swing system	MPa	27
先导系统压力 Pressure-pilot system	MPa	3.9

主要性能 Main Performance		
行走速度 (高/低) Travel speed (high/low)	km/h	3.4/2.3
回转速度 Swing speed	r/min	5.5
爬坡能力 Gradeability	°	35
接地比压 Ground pressure	kPa	150.5
铲斗挖掘力 Bucket digging force	kN	626
斗杆挖掘力 Arm digging force	kN	475
最大牵引力 Max. traction force	kN	746

标配 Standard		
动臂长度 Boom length	mm	7600
斗杆长度 Arm length	mm	3400
铲斗容量 Bucket capacity	m ³	8.0