

TUSKO[®]

TZ550

国四液压挖掘机

HYDRAULIC EXCAVATOR

工作质量
Quality of work
53000kg

铲斗斗容
Bucket capacity
3.1m³

额定功率
Rated power
331kW/1800rpm



Shandong Tusko Industrial Technology Co., Ltd.
Add: No. 66 Binhe east road, Economic Development
Zone, Linyi city, Shandong, China

售后服务热线(Service): 4008-0539-07
Web: www.tusko.com.cn
Email: sales@tusko.com.cn
Mob: +86-17568072206



* 本图册所列参数及图形照片, 仅供参考, 因产品不断改进参数会有所变动, 恕不通知, 请以实物为准。
* DUE TO OUR POLICY OF CONTINUOUS PRODUCT IMPROVEMENTS, ALL DESIGNS AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



 采用环保纸印刷

工作范围 Working Ranges mm

a	最大挖掘高度 Max. digging height	11060
b	最大卸载高度 Max. dumping height	7212
c	最大挖掘深度 Max. digging depth	7428
e	最大垂直挖掘深度 Max. digging depth	6608
f	最大挖掘半径 Max. digging reach on ground	11863
g	最小回转半径 Min. swing radius	5228

外形尺寸 Dimensions mm

A	总长 Overall length	12197
B	总宽 Overall width	3574
C	总高 Overall height	3280
D	转台宽度 Overall width of upperstructure	3125
E	履带长度 Track length	5480
F	底盘宽度 Chassis width	3340
G	履带宽度 Track shoe width	600
H	履带轴距 Track length on ground	4410
I	轨距 Track gauge	2740
J	配重离地间隙 Counterweight clearance	1320
K	最小离地间隙 Min. ground clearance	514
L	尾部最小回转半径 Min. tail swing radius	3746
M	履带高度 Track height	1240

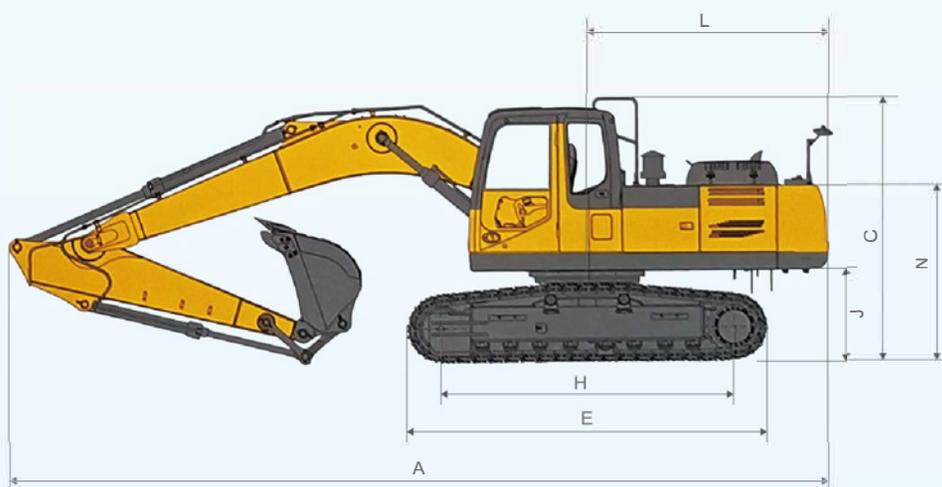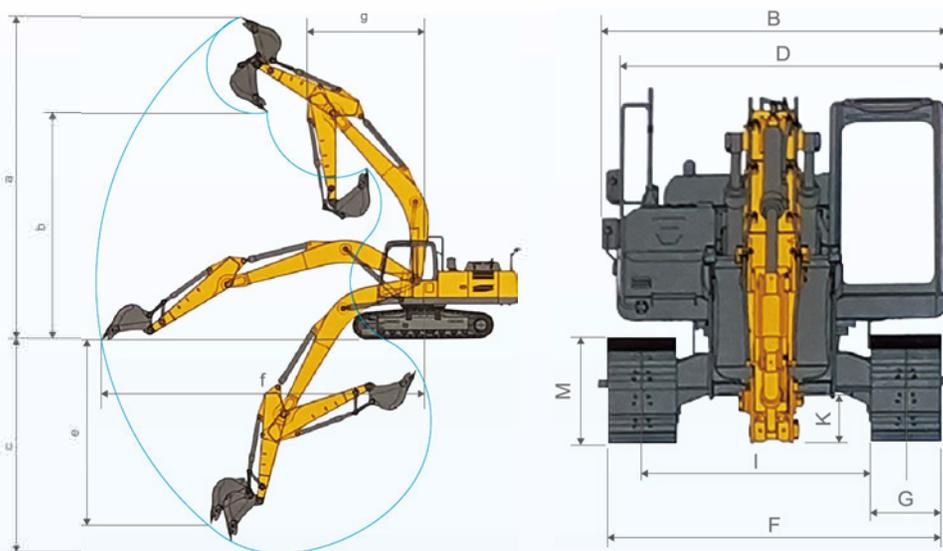

整机参数 Key Spec

产品型号 Product model		TZ550
操作重量 Operating weight	kg	53000
铲斗容量 Bucket capacity	m ³	3.1
发动机 Engine		
发动机型号 Engine model	/	DC13
直喷 Direct injection	/	✓
4冲程 4-stroke	/	✓
水冷 Water cooled	/	✓
缸数 No. of cylinders	/	6
发动机额定功率 Rated power	kW/rpm	331/1800
排量 Displacement	L	12.7
油类容量 Oil Capacity		
燃油箱容积 Fuel tank	L	790
液压油箱容积 Hydraulic tank	L	500
发动机机油容量 Engine oil	L	45
液压系统 Hydraulic System		
主泵额定流量 Rated flow of main pump	L/min	2×414

主安全阀压力 Pressure-main valve	MPa	34.3
行走系统压力 Pressure-travel system	MPa	34.3
回转系统压力 Pressure-swing system	MPa	26.9
先导系统压力 Pressure-pilot system	MPa	3.9
主要性能 Main Performance		
行走速度 (高/低) Travel speed (high/low)	km/h	4.8/3.0
回转速度 Swing speed	r/min	8
爬坡能力 Gradeability	°	35
接地比压 Ground pressure	kPa	89.5
铲斗挖掘力 Bucket digging force	kN	316
斗杆挖掘力 Arm digging force	kN	280
最大牵引力 Max. traction force	kN	356
标配 Standard		
动臂长度 Boom length	mm	7000
斗杆长度 Arm length	mm	2800
铲斗容量 Bucket capacity	m ³	3.1