

TUSKO[®]

TK60

国四液压挖掘机

HYDRAULIC EXCAVATOR

工作质量
Quality of work
6150kg

铲斗容量
Bucket capacity
0.23m³

额定功率
Rated power
36.2kW/2100rpm



Shandong Tusko Industrial Technology Co., Ltd.
Add: No. 66 Binhe east road, Economic Development Zone, Linyi city, Shandong, China


售后服务热线(Service): 4008-0539-07
Web: www.tusko.com.cn
Email: Sales@tusko.com.cn
Mob: +86-186-0539-3179



* 本图册所列参数及图形照片, 仅供参考, 因产品不断改进参数会有所变动, 恕不通知, 请以实物为准。
* DUE TO OUR POLICY OF CONTINUOUS PRODUCT IMPROVEMENTS, ALL DESIGNS AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


工作范围 Working Ranges mm

a	最大挖掘高度 Max. digging height	5805
b	最大卸载高度 Max. dumping height	4070
c	最大挖掘深度 Max. digging depth	3815
e	最大垂直挖掘深度 Max. digging depth	2762
f	最大挖掘半径 Max. digging radius	5998
g	最小回转半径 Min. swing radius	1650

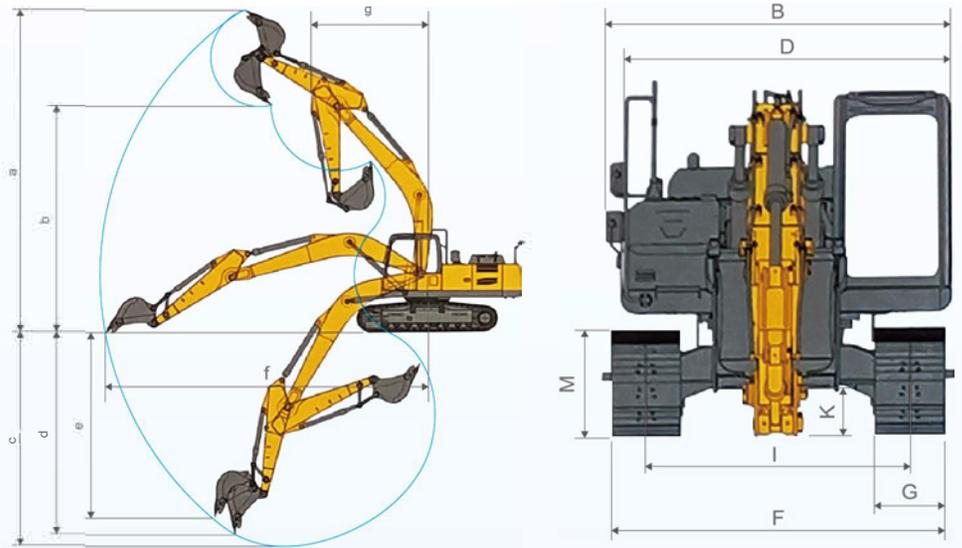

外形尺寸 Dimensions mm

A	总长 Overall length	6088
B	总宽 Overall width	1960
C	总高 Overall height	2686
D	转台宽度 Overall width of upperstructure	1876
E	履带长度 Track length	2558
F	底盘宽度 Chassis width	1960
G	履带宽度 Track shoe width	400
H	履带轴距 Track length on ground	2035
I	轨距 Track gauge	1560
J	配重离地间隙 Counterweight clearance	768
K	最小离地间隙 Min. ground clearance	393
L	尾部最小回转半径 Min. tail swing radius	1650
M	履带高度 Track height	580

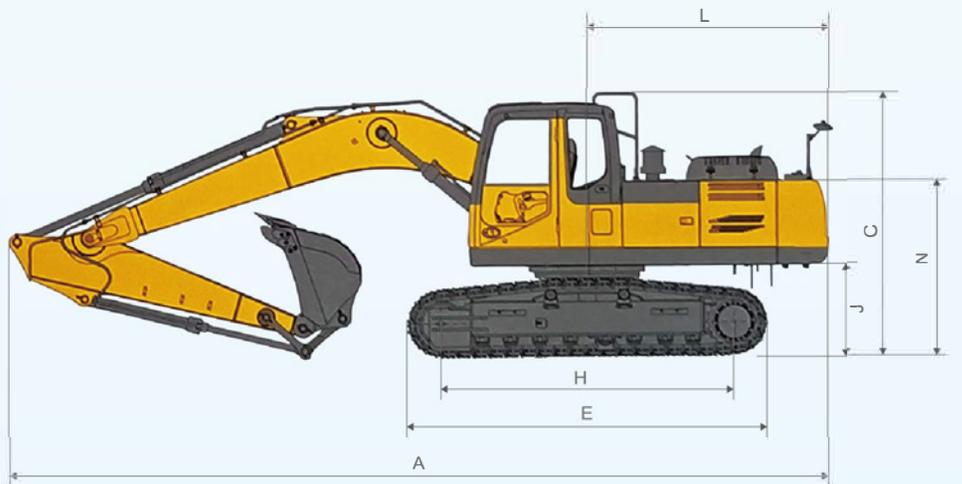

整机参数 Key Spec

产品型号 Product model	TZ60	
操作重量 Operating weight	kg	6150
铲斗容量 Bucket capacity	m ³	0.23
发动机 Engine		
发动机型号 Engine model	/	4TNV94L
直喷 Direct injection	/	✓
4冲程 4-stroke	/	✓
水冷 Water cooled	/	✓
缸数 No. of cylinders	/	4
发动机额定功率 Rated power	kW/rpm	35.9/2000
排量 Displacement	L	3.054
油类容量 Oil Capacity		
燃油箱容积 Fuel tank	L	128
液压油箱容积 Hydraulic tank	L	80
发动机机油容量 Engine oil	L	10
液压系统 Hydraulic System		
主泵额定流量 Rated flow of main pump	L/min	144

主安全阀压力 Pressure-main valve	MPa	21.5
行走系统压力 Pressure-travel system	MPa	21.5
回转系统压力 Pressure-swing system	MPa	21.5
先导系统压力 Pressure-pilot system	MPa	3.5

主要性能 Main Performance		
行走速度 (高/低) Travel speed (high/low)	km/h	4.1/2.4
回转速度 Swing speed	r/min	11.9
爬坡能力 Gradeability	°	35
接地比压 Ground pressure	kPa	33
铲斗挖掘力 Bucket digging force	kN	48
斗杆挖掘力 Arm digging force	kN	32
最大牵引力 Max. traction force	kN	45

标配 Standard		
动臂长度 Boom length	mm	3000
斗杆长度 Arm length	mm	1600
铲斗容量 Bucket capacity	m ³	0.23