



TUSKO[®]

TK650

国四液压挖掘机

HYDRAULIC EXCAVATOR

工作质量
Quality of work
65000kg

铲斗容量
Bucket capacity
3.8m³

额定功率
Rated power
368kW/1800rpm



Shandong Tusko Industrial Technology Co., Ltd.
Add: No. 66 Binhe east road, Economic Development
Zone, Linyi city, Shandong, China


Web: www.tusko.com.cn
Email: Sales@tusko.com.cn
Mob: +86-17568072206



* 本图册所列参数及图形照片, 仅供参考, 因产品不断改进参数会有所变动, 恕不通知, 请以实物为准。
* DUE TO OUR POLICY OF CONTINUOUS PRODUCT IMPROVEMENTS, ALL DESIGNS AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


工作范围 Working Ranges mm

| | | |
|---|-------------------------------------|-------|
| a | 最大挖掘高度 Max. digging height | 11434 |
| b | 最大卸载高度 Max. dumping height | 7699 |
| c | 最大挖掘深度 Max. digging depth | 7234 |
| e | 最大垂直挖掘深度 Max. digging depth | 5415 |
| f | 最大挖掘半径 Max. digging reach on ground | 11970 |
| g | 最小回转半径 Min. swing radius | 5173 |

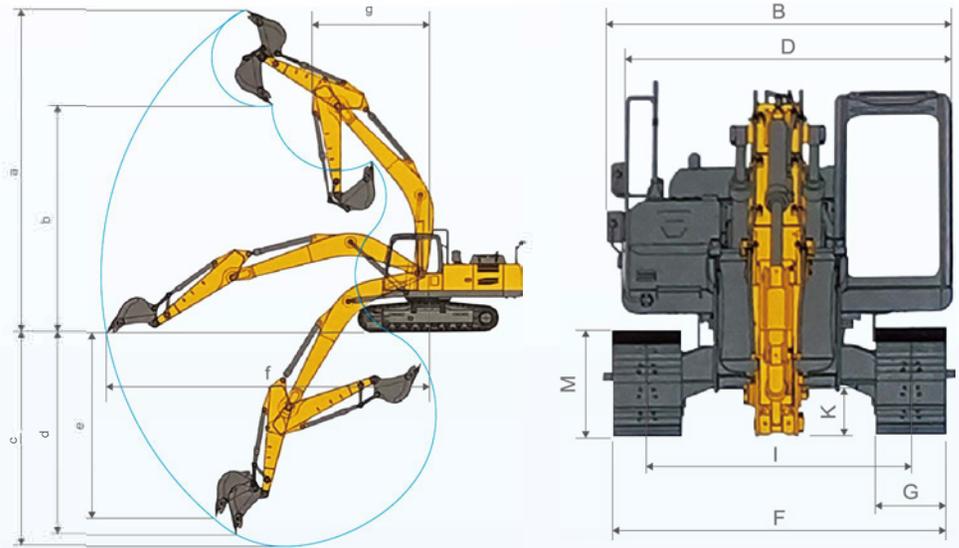

外形尺寸 Dimensions mm

| | | |
|---|--------------------------------------|-------|
| A | 总长 Overall length | 12614 |
| B | 总宽 Overall width | 3762 |
| C | 总高 Overall height | 3483 |
| D | 转台宽度 Overall width of upperstructure | 3300 |
| E | 履带长度 Track length | 5660 |
| F | 底盘宽度 Chassis width | 3490 |
| G | 履带宽度 Track shoe width | 600 |
| H | 履带轴距 Track length on ground | 4575 |
| I | 轨距 Track gauge | 2890 |
| J | 配重离地间隙 Counterweight clearance | 1472 |
| K | 最小离地间隙 Min. ground clearance | 584 |
| L | 尾部最小回转半径 Min. tail swing radius | 4180 |
| M | 履带高度 Track height | 1260 |

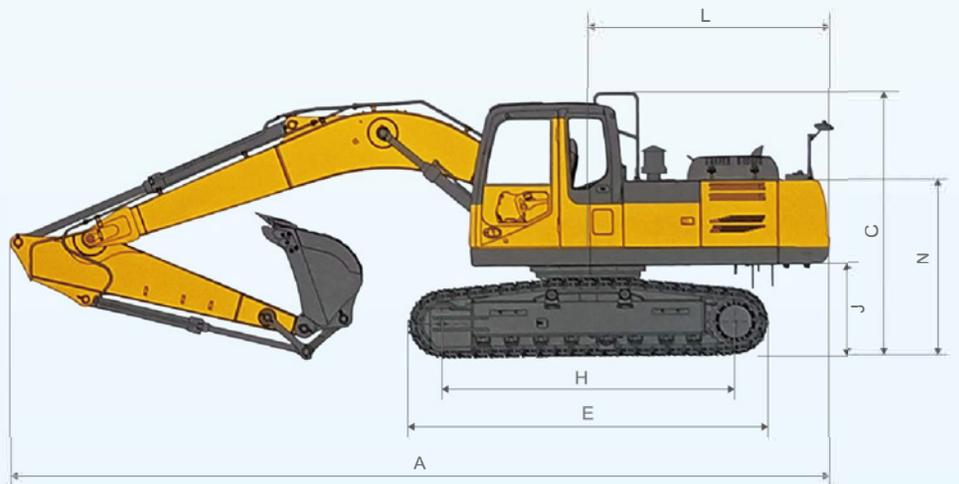

整机参数 Key Spec

| | | |
|-----------------------|----------------|-----------|
| 产品型号 Product model | | TZ650 |
| 操作重量 Operating weight | kg | 65000 |
| 铲斗容量 Bucket capacity | m ³ | 3.8 |
| 发动机 Engine | | |
| 发动机型号 Engine model | / | DC13 333A |
| 直喷 Direct injection | / | ✓ |
| 4 冲程 4-stroke | / | ✓ |
| 水冷 Water cooled | / | ✓ |
| 缸数 No. of cylinders | / | 6 |
| 发动机额定功率 Rated power | kW/rpm | 368/1800 |
| 排量 Displacement | L | 12.7 |
| 油类容量 Oil Capacity | | |
| 燃油箱容积 Fuel tank | L | 870 |
| 液压油箱容积 Hydraulic tank | L | 650 |
| 发动机机油容量 Engine oil | L | 45 |

| | | |
|------------------------------------|----------------|---------|
| 液压系统 Hydraulic System | | |
| 主泵额定流量 Rated flow of main pump | L/min | 2X504 |
| 主安全阀压力 Pressure-main valve | MPa | 34.3 |
| 行走系统压力 Pressure-travelsystem | MPa | 34.3 |
| 回转系统压力 Pressure-swingsystem | MPa | 26.9 |
| 先导系统压力 Pressure-pilot system | MPa | 3.9 |
| 主要性能 Main Performance | | |
| 行走速度 (高/低) Travel speed (high/low) | km/h | 4.8/3.1 |
| 回转速度 Swing speed | r/min | 7.0 |
| 爬坡能力 Gradeability | • | 35 |
| 接地比压 Ground pressure | kPa | 112 |
| 铲斗挖掘力 Bucket digging force | kN | 358 |
| 斗杆挖掘力 Arm digging force | kN | 316 |
| 最大牵引力 Max. traction force | kN | 441 |
| 标配 Standard | | |
| 动臂长度 Boom length | mm | 7000 |
| 斗杆长度 Arm length | mm | 3000 |
| 铲斗容量 Bucket capacity | m ³ | 3.8 |